

Special skirting tape for DÖLLKEN core skirting boards

Toptac 35

Bonding DÖLLKEN core skirting boards securely

Applications:

Special adhesive system for the bonding of DÖLLKEN core skirting boards. Toptac 35 ensures the quick and solvent-free installation for interior areas and meets TRGS 610.

► Suitable for:

- DÖLLKEN core skirting board S 60
- DÖLLKEN core skirting board S 100
- DÖLLKEN core skirting board C 60
- DÖLLKEN core skirting board D 60
- DÖLLKEN core skirting board TS 60
- DÖLLKEN core skirting board TS 100
- DÖLLKEN base profile GP 20 with system skirting boards MD 63 und SL 48

► Suitable for use on:

- Plaster
- Brickwork
- Metal (untreated)
- Painted surfaces
- Plastics
- Wood
- Concrete
- Ceramics
- Gypsum (primed)
- Wallpaper*
- Levelling compound (primed)

* see „Notes for preparation“

Provides the highest possible level of emission safety and contributes towards creating a healthy room climate. Marked with the "Blue Angel" for low-emission floor covering adhesives and other installation materials according to RAL-UZ 113.



ÖKOLINE

for DÖLLKEN core skirting boards
ON substrates up to 1 mm structure height

Ingredients: Acrylic copolymers, wetting and defoaming agents, laid scrim, paper.

Product benefits / Features:

- DÖLLKEN-UZIN System Guarantee
- Does not become brittle, providing a strong & permanent bond
- Rapid even on concrete & metal
- Easier with Toptac applicator
- Solvent-free / complies with TRGS 610 (technical regulation for dangerous substances)
- "Blue Angel" as per RAL-UZ 113
- EMICODE EC 1 PLUS / very low-emission

Technical specifications:


Packaging:	Carton
Width of rolls:	35 mm
Length of rolls:	50 m
Shelf life:	min. 2 years
Colour:	transparent with green scrim
Substrate temperature:	min. 15 °C
Open time:	none
Working time:	none
Set to traffic:	immediately after bonding
Sealing / jointing seams:	immediately after bonding

Notes for preparation:

- ▶ Substrate preparation: The substrate must be permanently dry, hard, load-bearing, flat, free from grease, dust and silicon, in accordance with the respective national standards (EN, DIN, VOB, OE, SIA).
- ▶ Wallpaper must be cut / removed for the height covered by the skirting.
- ▶ Storage / transport: Do not roll core skirting (creates tension).
- ▶ Bind dust with solvent-free primer (UZIN Planus, UZIN PE 260 or UZIN PE 360).

The following is needed:

- ▶ Toptac 35, Toptac applicator, rubber mallet, carpet knife

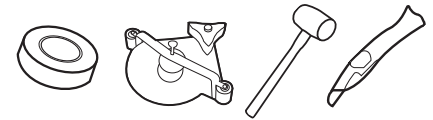

Tips for processing:

- ▶ Moisten knife with water to facilitate cutting

Application:



- ▶ Pull up and lock the roll holder
- ▶ Fit the adhesive-repellent paper discs



- ▶ Depending on the direction of work, place the Toptac 35 in the applicator running to the left or the right
- ▶ Lower the roll holder



- ▶ Place Toptac 35 with applicator against the wall
- ▶ For TS 100 and S 100 position a second strip of Toptac 35 directly above the first strip



- ▶ Remove the Toptac protective paper
- ▶ Fit the core skirting board to the Toptac 35
- ▶ Tap in all over using the rubber mallet

Toptac applicator:



- ▶ Move beyond the corner up to the centre of the folding device



- ▶ Swivel rear pressure roller away from the wall
- ▶ Turn device around the corner so that the folding device maintains contact to the wall



- ▶ Move device to the corner
- ▶ Fold over folding device



- ▶ Move fully into the corner using the folding device
- ▶ Cut Toptac 35 in the corner

Important notes:

Store in a dry, cool area without exposure to direct sunlight.

- ▶ **Not guaranteed:**
 - Textile carpet skirting
 - Wooden base boards
 - Aluminium skirting
 - PVC soft skirting boards

Protection of the workplace and the environment:

The product does not require any special labour protection measures. For reasons of working hygiene, we recommend avoiding eating, drinking and smoking during processing of this product. Store out of the reach of children.

For more information refer to www.uzin.com or contact +49 (0)731 4097-0

Disposal:

Empty shells and the cardboard packaging can be recycled. Material remnants can be disposed of as household waste.

Warranty:

UZIN and Döllken guarantee all properties stated in the installation instructions for a period of 5 years.

- Follow the generally acknowledged rules of the trade and of technology for the installation of floor covering of the respective applicable standards (EN, DIN, VOB, OE, SIA).

In all cases, some adhesion tests must be carried out on-site before carrying out the installation.

The warranty becomes void if:

- the product is exposed to unusual impact especially of chemical or mechanical nature.
- used or processed differently than stated in the installation instructions.
- if no steel pins/staples were used in the ends of the skirting in case of tensions.
- Toptac 35 is used on stairs.
- Moisture affects Toptac 35.
- Toptac 35 is used in vehicle manufacturing and operating theatres.
- installation was performed below 15 °C (on the wall).
- Toptac 35 is used in areas with increased humidity or thermal exposures (e.g. conservatories).